

(※事後修正済み)

核融合駆動用加速器のコンパクト化に関する設計研究  
**Fundamental design of compact high-energy hadron accelerator  
 for nuclear fusion driver**

佐野光<sup>1</sup>、浅井朋彦<sup>1</sup>、小口治久<sup>2</sup>、中村英滋<sup>3-5, 1, 8</sup>、酒井泉<sup>5</sup>、石禎浩<sup>6</sup>、上杉智教<sup>6</sup>、高山正和<sup>7</sup>、  
 藪上信<sup>8</sup>、稲垣滋<sup>9</sup>  
 日大<sup>1</sup>、産総研<sup>2</sup>、KEK加速器<sup>3</sup>、総研大<sup>4</sup>、福井大<sup>5</sup>、京大原子炉実験所<sup>6</sup>、秋田県立大<sup>7</sup>、  
 東北学院大<sup>8</sup>、九大応力研<sup>9</sup>

Hikaru Sano<sup>1</sup>, Tomohiko Asai<sup>1</sup>, Haruhisa Koguchi<sup>2</sup>, Eiji Nakamura<sup>3-5, 1, 8</sup>, Izumi Sakai<sup>5</sup>,  
 Yoshihiro Ishi<sup>6</sup>, Tomonori Uesugi<sup>6</sup>, Masakazu Takayama<sup>7</sup>, Shin Yabukami<sup>8</sup>, Shigeru  
 Inagaki<sup>9</sup>

Nihon Univ.<sup>1</sup>, AIST<sup>2</sup>, KEK Acc.-Lab.<sup>3</sup>, SOKENDAI<sup>4</sup>, Fukui Univ.<sup>5</sup>, KURRI<sup>6</sup>, Akita Pref. Univ.<sup>7</sup>,  
 Tohoku Gakuin Univ.<sup>8</sup>, RIAM<sup>9</sup>

The application of GeV-class hadron particles to new energy production by using nuclear fusion reactors has been discussed. The engineering techniques to produce high-energy particles have been rapidly developed recently, and the techniques are also used to the NBI (Neutral Beam Injection) for plasma science research and a new study of muon-catalyzed fusion. On the other hand, the electric power conversion ratio of conventional particle accelerators is very low. LINAC has better electric power conversion characteristics and is capable to apply the resonant cavities with high-gradient electric field of 35 MV/m [1], but the scale of LINAC is large. Cyclotron is the most popular accelerator and is compact, but the large amount of magnetic materials of ten thousand tons is required to produce GeV-class particles. Synchrotron is compact and does not require such huge magnetic materials, but the output beam power is low and it is subtle unstable for AC-magnetic field operation to supply high-energy beam. The FFAG accelerator [2] is attractive for this study because it is compact with small magnetic materials, and is capable to supply stable beam for DC-magnetic field operation, although the electric field of the acceleration rf-devices is low up to 100 kV/m due to the requirements for large aperture and for time-variation of rf frequency to adjust to the non-linear velocity of high-energy particles. We have studied to improve the FFAG accelerator by applying magnetic field configuration to main bending magnets, to satisfy

isochronous condition and phase stability. Figure 1 shows the conceptual design of the new accelerator, which is like microtron [3]. An example of the magnetic field configuration (Fig. 2) and the related articles are reported here.

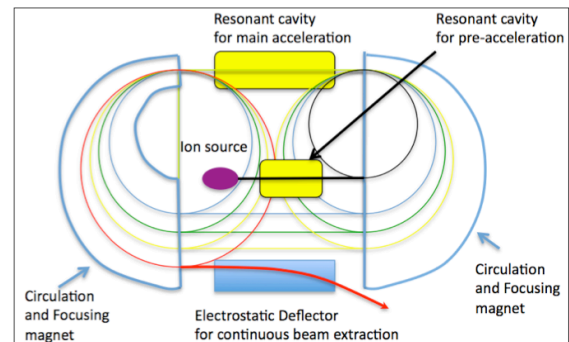


Fig. 1. Conceptual figure of high-energy microtron.

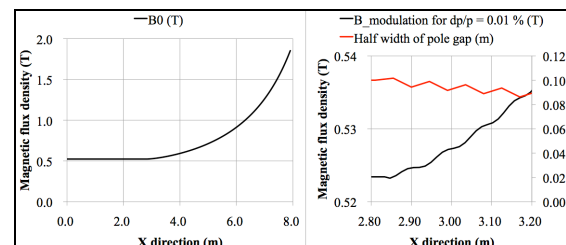


Fig. 2. An example of magnetic field configuration to energize 0.1 GeV proton up to 1.1 GeV. Left: magnetic field configuration to satisfy the isochronous condition. Right: magnetic field configuration to satisfy the isochronous condition with phase stability for  $dp/p = 0.01\%$ .

**Acknowledgement:** This work was supported by KAKENHI25286089.  
**References:** [1] ILC Reference Design Report, <<http://www.linearcollider.org/ILC/Publications/Reference-Design-Report>>. [2] Y. Mori, Nucl. Instr. and Meth. **A 451**, 300 (2000). [3] D. Hasegawa, *et al.*, Proc. of the 8<sup>th</sup> Annual Meeting of PASJ, Aug. 1-3, 2011, Tsukuba, Japan (2011) pp.872.