

Beam-beam simulations for SuperKEKB Phase-3

Demin Zhou

Acknowledgements:

K. Ohmi, Y. Ohnishi, A. Morita

SuperKEKB mini-optics meeting

Jan. 17, 2019, KEK

Outline

- **Introduction**
- **Simulation using BBSS**
- **Summary**

1. Introduction

➤ Phase-3 machine parameters (Road map)




- Ref. A. Morita, Talk at SuperKEKB commissioning meeting, Oct. 12, 2018

	1		1ex		2		2ex		3		3'		3ex	
	HER	LER	HER	LER	HER	LER	HER	LER	HER	LER	HER	LER	HER	LER
I_b (A)	1.0	1.2	1.0	1.4	1.0	1.4	1.2	1.7	1.3	1.8	1.15	1.6	1.4	2.0
# bunch	1576		1576		1576		1576		1576		1576		1576	
ϵ_x (nm)	4.6	2.0	4.6	2.0	4.6	2.0	4.6	2.0	4.6	2.0	4.6	2.0	4.6	2.0
ϵ_y (pm)	368	160	230	150	138	140	128.8	130	138	140	101.2	100	101.2	100
β_x (mm)	100	100	100	100	100	100	100	100	100	100	100	100	100	100
β_y (mm)	3	3	3	3	2	2	2	2	1.4	1.4	1.25	1.25	1.2	1.2
σ_z (mm)	6	6	6	6	6	6	6	6	6	6	6	6	6	6
v_x	45.57	44.57	45.57	44.57	45.57	44.57	45.57	44.57	45.57	44.57	45.57	44.57	45.57	44.57
v_y	43.61	46.61	43.61	46.61	43.61	46.61	43.61	46.61	43.61	46.61	43.61	46.61	43.61	46.61
v_s	0.0258	0.0225	0.0258	0.0225	0.0258	0.0225	0.0258	0.0225	0.0258	0.0225	0.0258	0.0225	0.0258	0.0225
ξ_y (Geom.)	0.0272	0.0262	0.0328	0.0331	0.0278	0.0351	0.0351	0.0436	0.0302	0.0387	0.0301	0.0397	0.0369	0.0453
\mathcal{L} (Geom.)	1.06E+34		1.46E+34		2.08E+34		3.14E+34		4.11E+34		4.00E+34		6.20E+34	
\mathcal{L} (BBSS)	1.00E+34		1.30E+34		1.74E+34		2.16E+34		2.52E+34		2.55E+34		3.21E+34	

2. BBSS simulation

➤ All parameter set (3ex): $v_y = *.61$

● Scan of v_x (same fractional part for LER and HER)

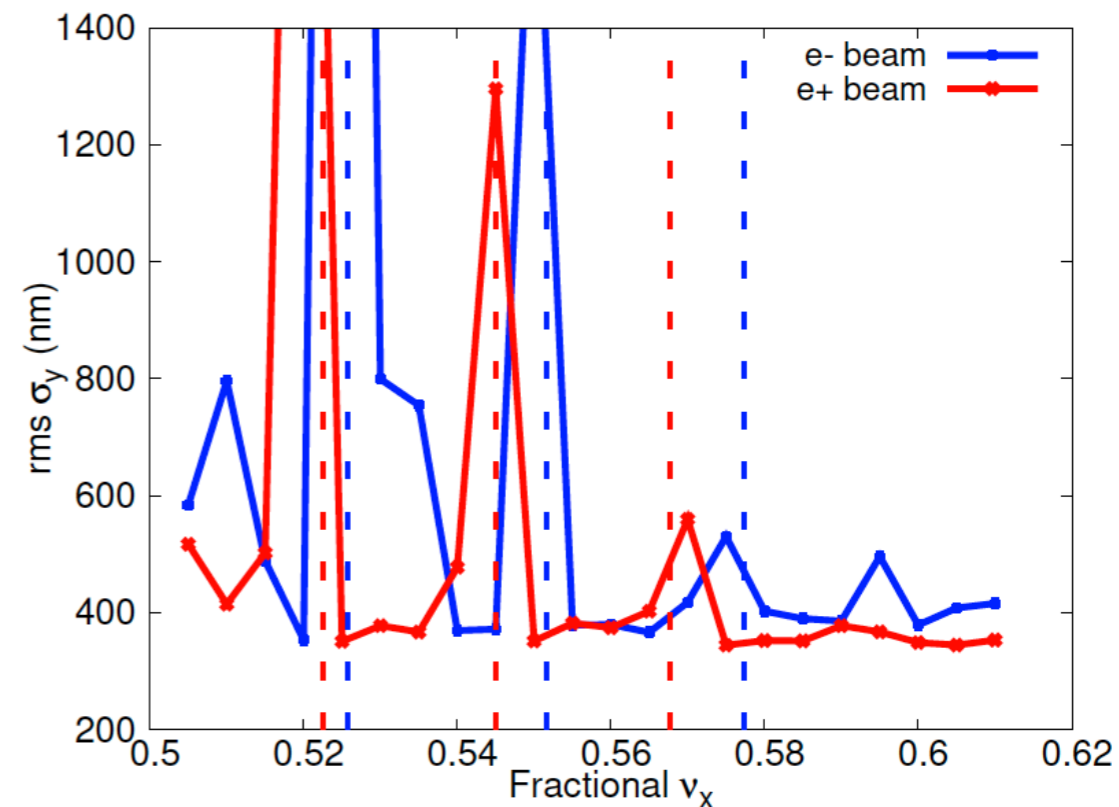
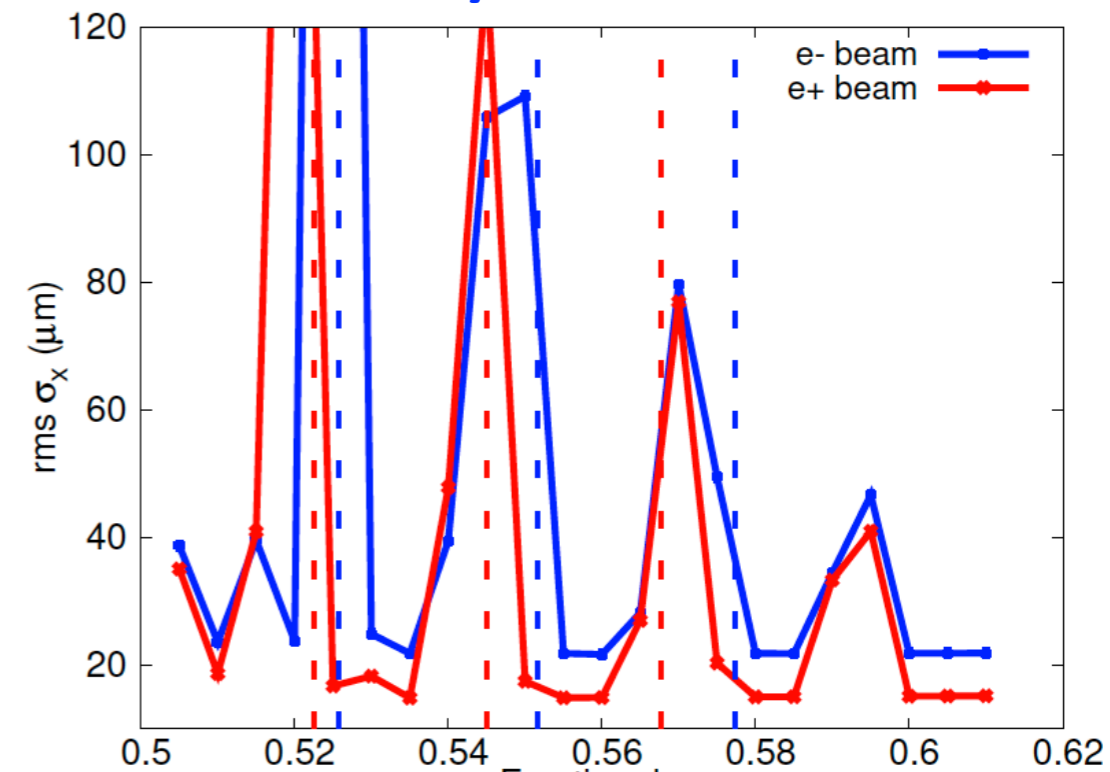
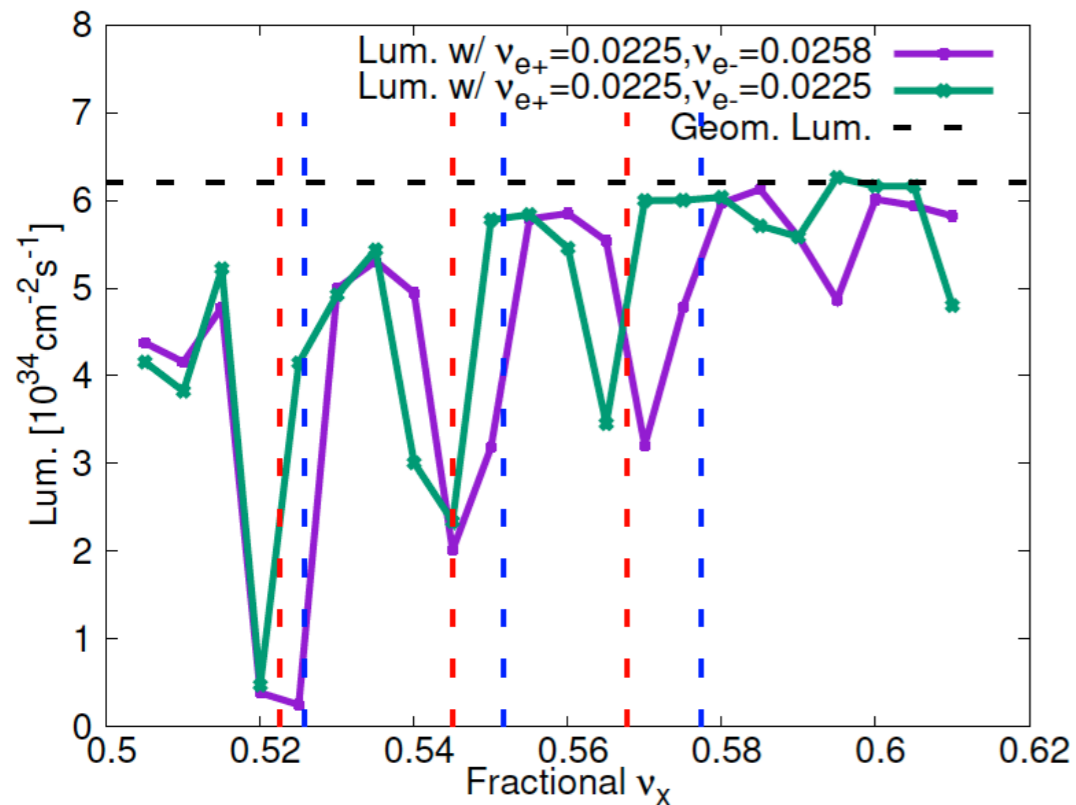


Beam sizes for $v_{s+}=.0225, v_{s-}=.0258$

2. BBSS simulation

➤ All parameter set (3ex): $v_y = *.61$

● Scan of v_x (same fractional part for LER and HER)

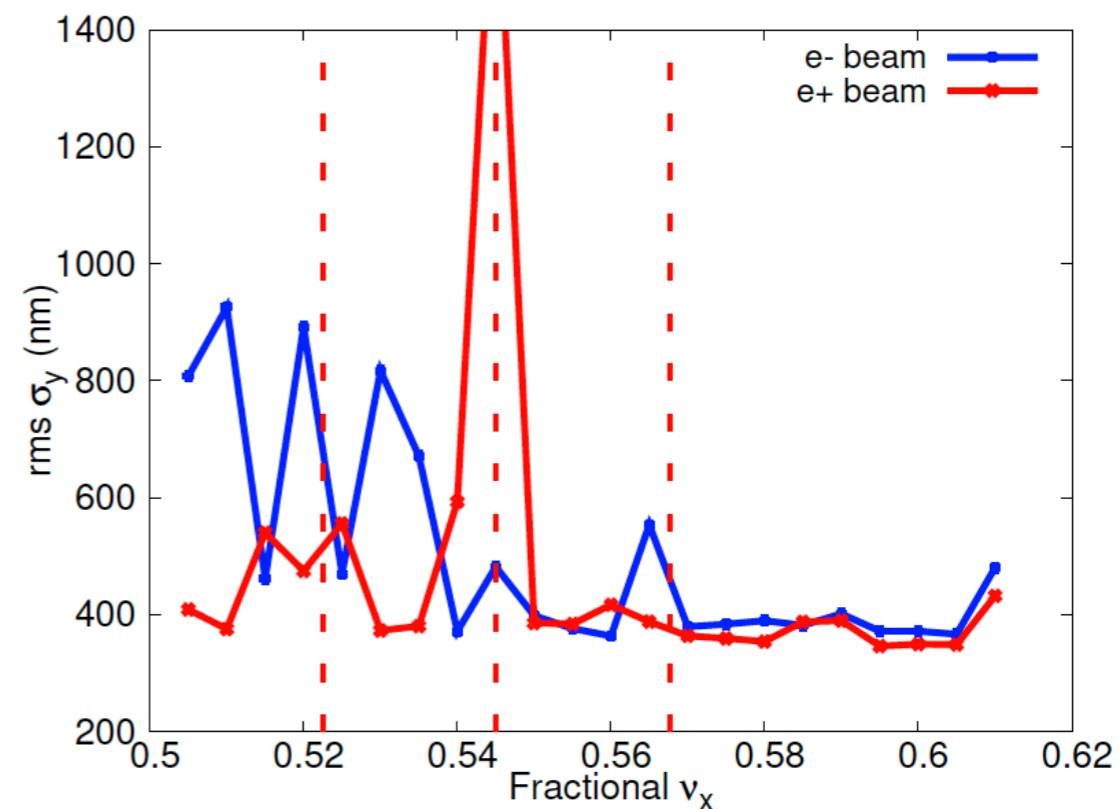
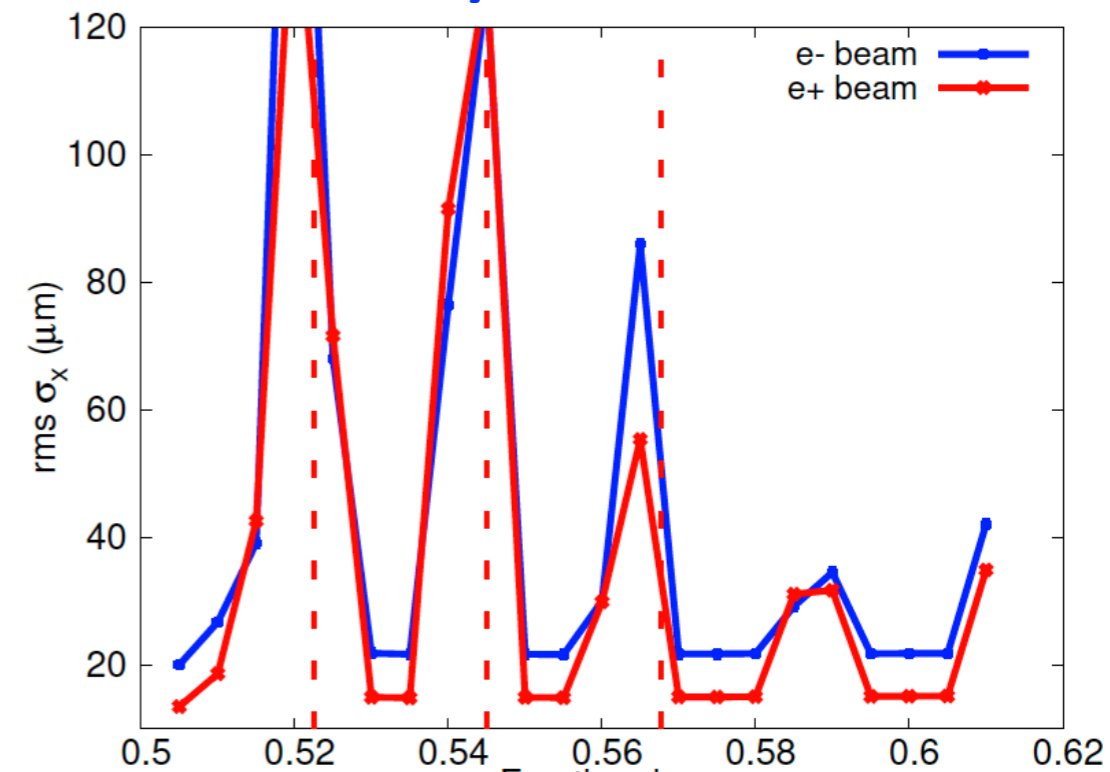
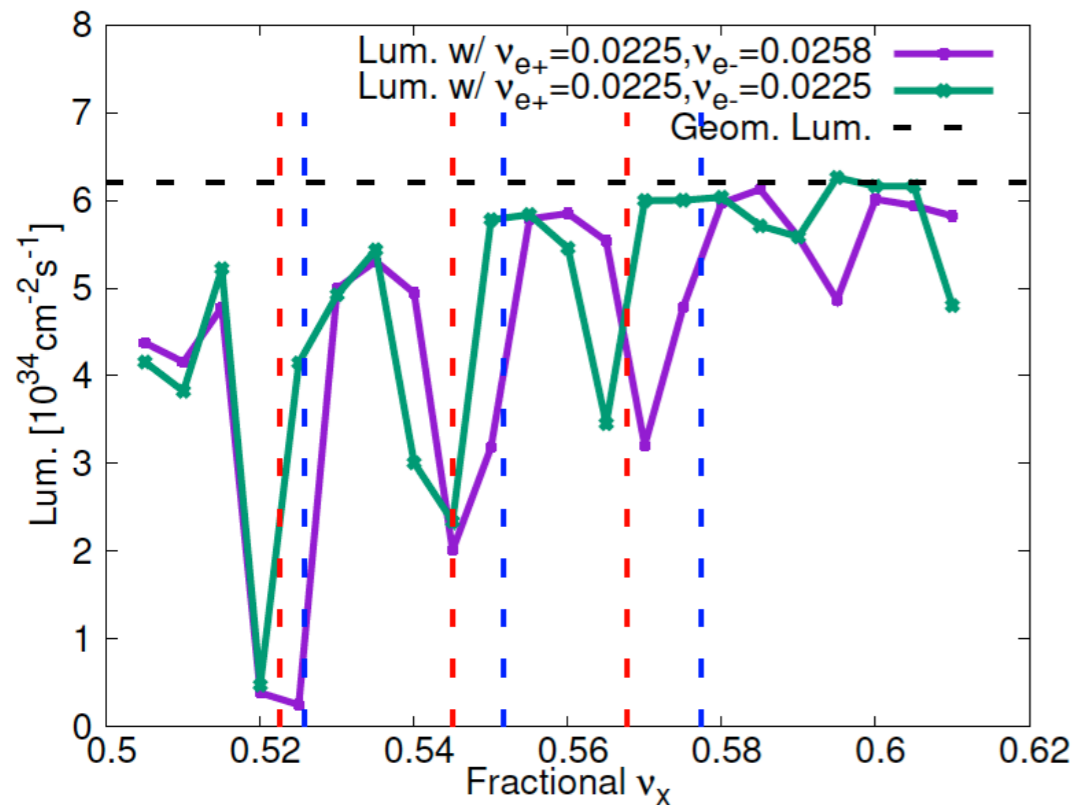


Beam sizes for $v_{s+}=.0225, v_{s-}=.0225$

2. BBSS simulation

➤ All parameter set (1): $v_y = *.61$

● Scan of v_x (same fractional part for LER and HER)

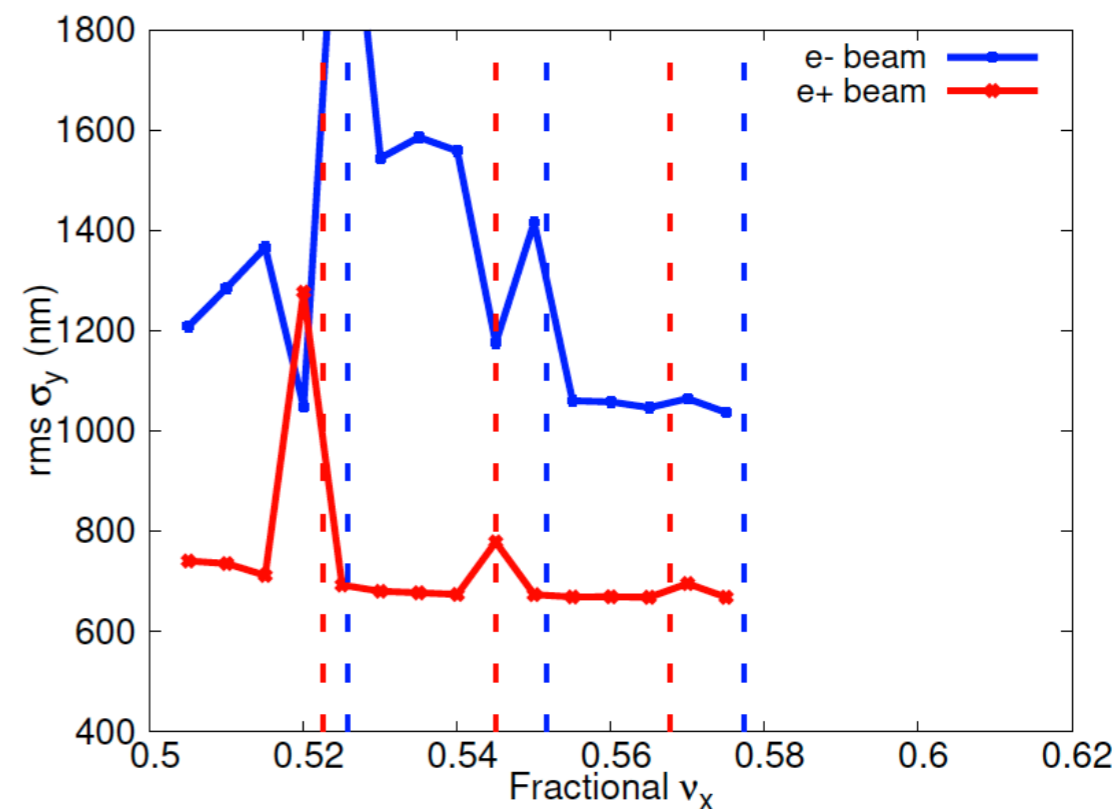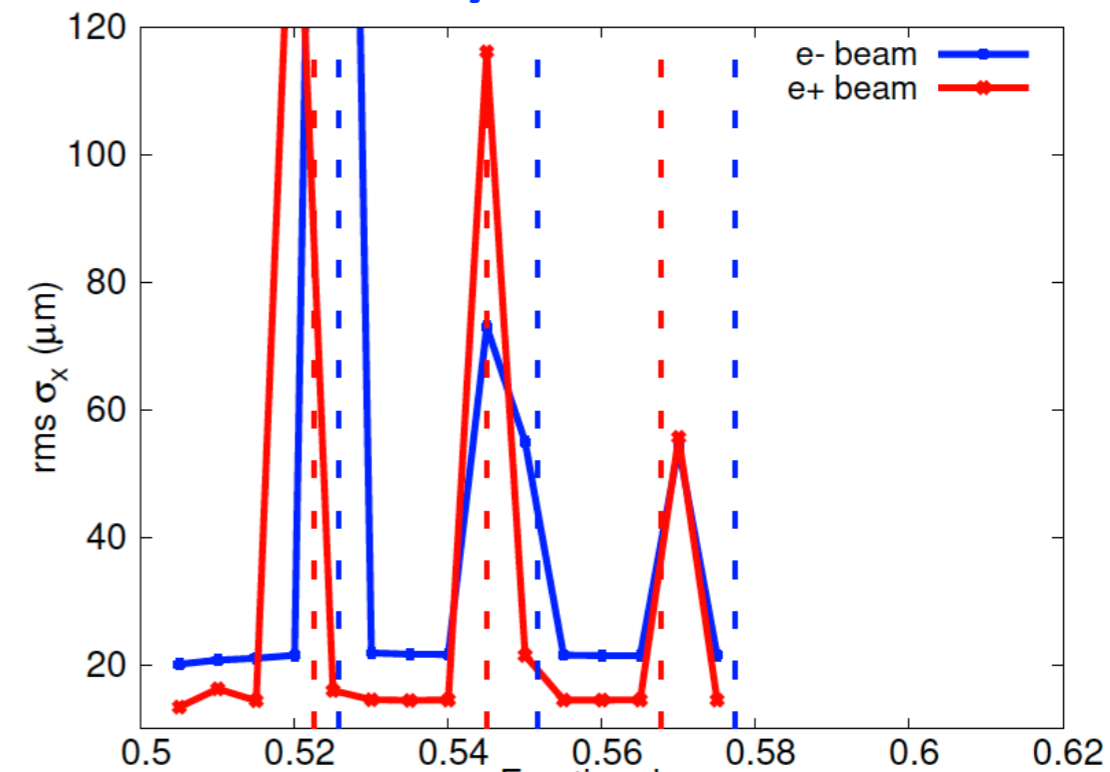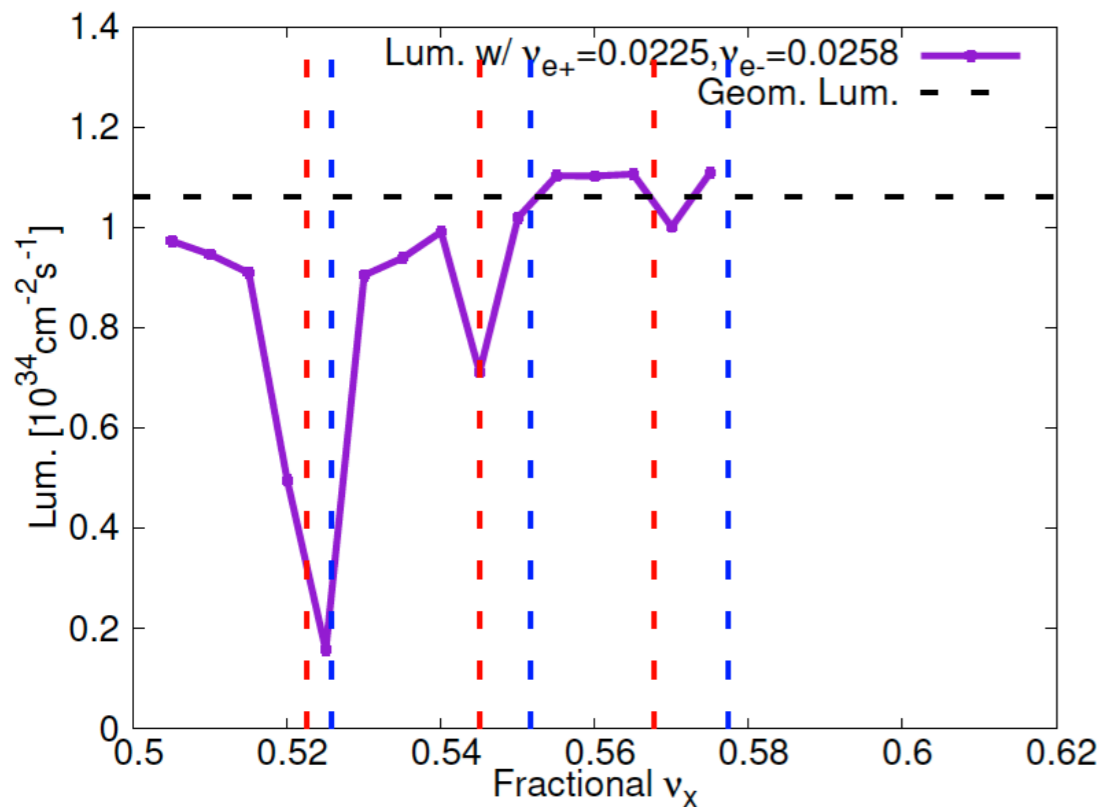

Beam sizes for $v_{s+}=.0225, v_{s-}=.0258$

3. Summary

➤ Simulations using BBSS

- x-z beam-beam instability (or blow-up) easily seen in BBSS simulations

- Likely $v_{s+}=v_{s-}$ is better than $v_{s+}\neq v_{s-}$?